




BTU RESEARCH™

UPS SOLIDSWITCH-AE

Multiport PoE Switch and UPS

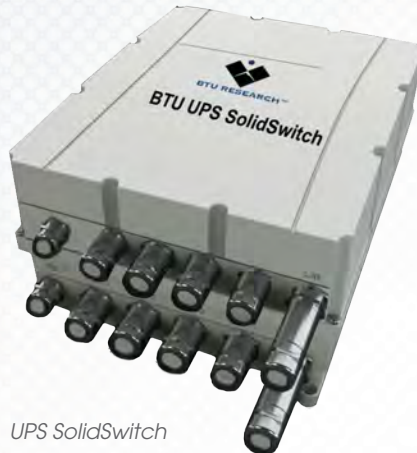

UPS SolidSwitch
8-Port Switch



Budget constraints and space limitations were often reasons end users would forego uninterruptible power to edge devices. BTU's "Uninterruptible Power (over Ethernet) Supply™" changes this entirely. With the all new **UPS SolidSwitch**, integrators and engineers now have the ability to add UPS to their design using a device that takes no more space than a conventional switch, adds no more cost to network installation budgets and is priced comparably to high quality, conventional, outdoor switches. A fresh approach to UPS where "always on power" will soon be the new norm for mission critical devices. Now in 24 volt solar or wind turbine powered versions. No more voltage drops needed in the middle of nowhere. Just connect your power source directly into our unit with on-board charge controllers and attach your devices.

HIGHLIGHTS

The **SolidSwitch-AE's** compact profile is made possible by the use of a small, PCB-mounted, 600-watt power supply, making way for a compact, yet highly efficient, Lithium Ion power pack. This inclusive power pack has a respectable 350Wh of emergency backup, expandable to a substantial 1400Wh with the "UPS Power Cover". Charge controller on-board allows for seamless integration with your power source.

ADVANTAGES

- **SolidSwitch-AE** adds a new dimension to network infrastructure by seamlessly introducing an Uninterruptible Power Supply to the network through a POE switch.
- **SolidSwitch-AE** is made possible by BTU's "Uninterruptible Power (over Ethernet) Supply™".
- The compact UPS **SolidSwitch-AE** includes a respectable 350Wh of emergency backup, expandable to a substantial 1400Whrs with the "UPS Power Cover".
- Utilizing the SolidSwitch Command Post, a user interface (GUI/CLI) designed to simplify system administrator programming tasks, over the network programming for a multitude of operations is made easy.
- On-board Battery Management System (BMS) that constantly checks and monitors the health of each battery pack (user configurable).
- Provides investment protection by enabling a unified network for data, voice, and video.
- Provides an overall lower total cost of ownership (TCO), than traditional methods



UPS SolidSwitch
8 Port Switch

LAYER 3 SWITCH

- Fully managed layer 3, 4 or 8 ports 10/100/1000 Mbps fast Ethernet switch with 2 SFP-based Gigabit Ethernet ports and a Mini B Console
- Auto-negotiation and auto-sensing (MDI/MDI-X)
- SNMP v3 DES/AES/AES192/AES256
- Supports IEEE 802.1d Spanning Tree Protocol (STP)
- Supports IEEE 802.1p Quality of Service (QoS), 4 priority queues with dynamic packet mapping
- Supports IEEE 802.1q VLAN support for 128 groups and 4096 ID's
- Supports IEEE 802.1s Multiple Spanning Tree Protocol (MSTP).
- Supports IEEE 802.1w Rapid Spanning Tree Protocol (RSTP).
- Supports IEEE 802.1x allows dynamic, port-based security, providing user authentication.
- Supports IEEE 802.3 10Base-T
- Supports IEEE 802.3u 100Base-TX
- Supports IEEE 802.3ab 1000Base-T
- Supports IEEE 802.3x Flow control/Collision control
- Supports Internet Group Management Protocol (IGMP) v1/v2/v3
- Supports Jumbo Frames up to 9000 bytes
- Supports IPv6 Multicast Listener Discovery (MLD)
- Supports TACACS & Radius AAA protocols
- Port mirroring/monitoring/sniffing
- Supports RIPv2 and OSPF
- MIB counters (34 per port)
- Loopback modes
- Link diagnostic capabilities
- Supports Remote Monitoring/Switch Monitoring (RMON/SMON)
- Supports Trivial File Transfer Protocol/Secure File Transfer Protocol (TFTP/SFTP)
- Supports Network Time Protocol (NTP)
- UL497B Compliant POE Surge Protection on-board

Maximum Power Output	150W and Coming soon a 240W Version	
Dimensions	350Wh unit: 283mm x 230mm x 76mm	1400Whrs unit: 283mm x 230mm x 134mm
Weight	4.5Kg and 10.5Kg with UPS Power Cover	
VDC Input	20-36VDC, 36-70VDC, 43-160VDC	
POE Out Voltage Range	50 to 57 VDC	
Ports	4 or 8 PoE ports, 2 SFP ports and a Mini B console port	
Connectors	Shielded RJ-45 and Cage SFP	
Data Rates	10/100/1000 Mbps	
POE Output	Max output per port 60W and back compatible to IEEE802.3at/af	
Internal UPS Switching	Glitch Free, undetectable switching from AC power source to internal DC supply	
Internal Battery Cells	LG INR18650F1L, Cylindrical Li-Ion, Nominal Std charge/discharge: 3350mAh	
Internal Battery Pack	1 each 28 cell 7S4P pack with up to 3 added packs in UPS Power Cover	
Internal UPS Emergency Power	350Wh expandable to 1400Wh w/optional "UPS Power Cover"	
Mounting	Wall Mountable or Pole Mountable with optional Pole Mounting Kit	
Enclosure	Dust and Water Intrusion: IEC60529, Level IP68, NEMA 6P	
Operating Temperature	Meets NEMA TS-2 Standards	
Operating Humidity	Meets NEMA TS-2 Standards	
Storage Temperature	Meets NEMA TS-2 Standards	
Storage Humidity	Meets NEMA TS-2 Standards	
Safety & Regulatory Compliance	UL, cUL, CE, RoHS Compliant, WEEE Compliant, UL497B POE Compliant	
Warranty	UPS Switch: 2 Years	Battery Packs: 1 Years